# **Product Specification**







#### A. & H. Meyer GmbH Leuchten und Büroelektrik

Fermke 8 32694 Dörentrup Germany

T: +49 5265 9488 0 F: +49 5265 9488 11 www.ah-meyer.de

## **A. & H. Meyer Sdn Bhd** (528797-M)

No. 3, Jalan Astaka U8/84 Section U8, Bukit Jelutong 40150 Shah Alam, Selangor Malaysia

T: +603 7845 7277 F: +603 7845 2155 sales@ah-meyer.com.my

# Floor Box P

#### Product Description

The NETSYSTEM Floor Box P is meant to accommodate 4 power outputs and direct access for data or multimedia cables. This unit offers a space efficient solution with aesthetically pleasing design to distribute power, data and multimedia services in the floor where cable trunking is mounted in the screed floor. Floor Box P requires a built-in depth of only 45mm which makes them the slimmest in the market. This Floor Box P is ideal to service 4 to 8 workstations with the necessary power and data or multimedia infrastructure.

#### Product Specification

- 4 Wieland GST18/3 connectors with 6 screw terminals each
- Options for RAW and UPS power
- Direct access for data or multimedia cables
- Access for cable glands of 20mm and 25mm
- Low installation depth of 45mm
- Termination options for HDMI, USB etc are available upon request
- Lid with a special locking device
- Flaps fitted with foam which allow cables to run through them
- Individual height adjustable screws to level the frame with the floor
- IP30 rated in accordance with BS EN 60529
- All plastic materials used are fire retardant

#### Application Range

- Screed flooring

#### Technical Details

- Rated for 110V to 250V to a maximum of 20A according to country specific standards
- Material: ABS and PA6 in VO specification (self-extinguishing according to UL94)
  - Galvanised sheet metal
- Wiring:  $3 \times 1.5 \text{mm}^2 \text{ or } 3 \times 2.5 \text{mm}^2$

Please follow local standards for electrical installation.

IN BUSINESS ALL THINGS ARE CONNECTED








#### Floor Box P

- 4 Wieland GST18/3 connectors with 6 screw terminals each
- Options for RAW and UPS power
- Direct access for data or multimedia cables
- Access for cable glands of 20mm and 25mm


### **Dimensions**






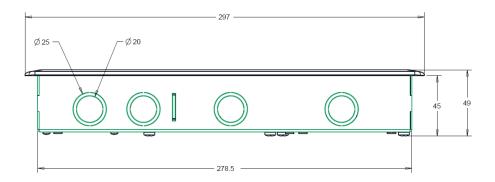





## **Screeding Dimension**

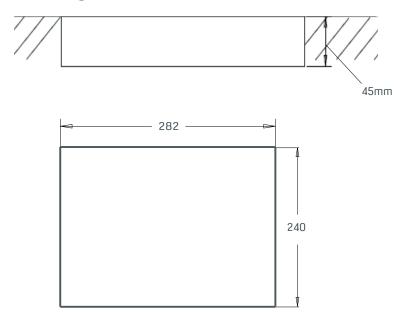

### Flooring Material Cutting Size

