Product Specification









A. & H. Meyer GmbH Leuchten und Büroelektrik

Fermke 8 32694 Dörentrup Germany

T: +49 5265 9488 0 F: +49 5265 9488 11 www.ah-meyer.de

A. & H. Meyer Sdn Bhd (528797-M)

No. 3, Jalan Astaka U8/84 Section U8, Bukit Jelutong 40150 Shah Alam, Selangor Malaysia

T: +603 7845 7277 F: +603 7845 2155 sales@ah-meyer.com.my

Floor Box RPD (Raised Floors)

Product Description

The NETSYSTEM Floor Box RPD for raised floor is meant to accommodate 2 power outputs and 4 blanking plates suitable for up to 8 data keystone or multimedia termination from either cable trunking or an underfloor busbar system. This unit offers a space efficient solution with aesthetically pleasing design. Floor Box RPD comes with a set of mounting brackets to hold it in the raised floor panel. A minimum clearance of 112mm between the raised floor surface and the concrete is required. The Floor Box RPD is ideal to service 2 to 4 workstations with the necessary power and data or multimedia infrastructure.

Product Specification

- 2 Wieland GST18/3 connectors with 6 screw terminals each
- Options for RAW and UPS power
- 4 blanking plates suitable for up to 8 data keystone modules
- Access for cable glands of 20mm and 25mm
- Termination options for HDMI, USB etc are available upon request
- Comes with a set of mounting brackets to hold it in the raised floor panel
- Lid with a special locking device
- Flaps fitted with foam which allow cables to run through them
- Individual height adjustable screws to level the frame with the floor
- IP30 rated in accordance with BS EN 60529
- All plastic materials used are fire retardant

Application Range
Raised floors (min. clearance of 112mm between the raised floor surface and the concrete)

Technical Details

- Rated for 110V to 250V to a maximum of 20A according to country specific standards
- Material: ABS and PA6 in V0 specification (self-extinguishing according to UL94) Galvanised sheet metal
- Wiring: $3 \times 1.5 \text{mm}^2$ or $3 \times 2.5 \text{mm}^2$

Please follow local standards for electrical installation.

IN BUSINESS ALL THINGS ARE CONNECTED

Floor Box RPD (Raised Floors)






Floor Box RPD (Raised Floors)


- 2 Wieland GST18/3 connectors with 6 screw terminals each
- Options for RAW and UPS power
- 4 blanking plates suitable for up to 8 data keystone modules

236

- Access for cable glands of 20mm and 25mm

Dimensions

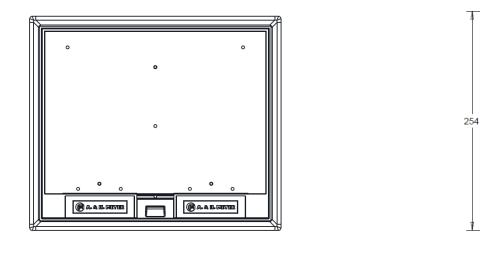


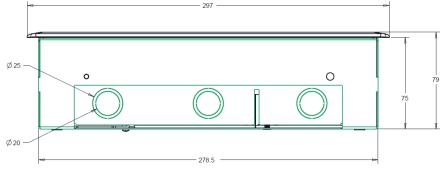






Raised Floor Dimensions

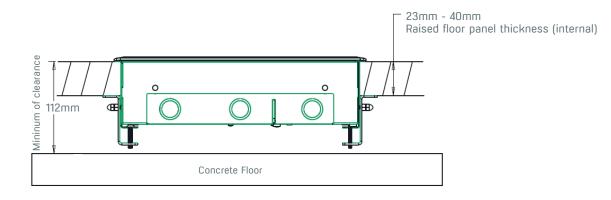


Cut Out Dimensions

Raised Floor Cut Out



Lid Insert



Flooring material thickness

7mm