Product Specification











A. & H. Meyer GmbH Leuchten und Büroelektrik

Fermke 8 32694 Dörentrup Germany

T: +49 5265 9488 0 F: +49 5265 9488 11 www.ah-meyer.de A. & H. Meyer Sdn Bhd (528797-M) No. 3, Jalan Astaka U8/84 Section U8, Bukit Jelutong 40150 Shah Alam, Selangor Malaysia

T: +603 7845 7277 F: +603 7845 2155 sales@ah-meyer.com.my

NETBOX Rail

Product Description

NETBOX Rail is a built in power, data and multimedia unit in aluminum finish for thin panel systems.

Product Specification

- Sleek contemporary profile with aluminum finish
- Suitable for surface mounting on panels and partitions
- Customisable unit with various configurations
- Unit available in any length
- Installation by fastening 4 plastic screws from behind
- Suitable for panels with minumum thickness of 30mm
- Plug & Play technology

Application Range

- Workstations
- Panel Systems
- Home Office
- Shelf Systems

Technical Details


- Rated for 110V to 250V and a maximum of 20A according to country specific standards
- Low concentration of heavy metal
- Material: PA-FR (self-extinguishing according to UL94)
- Wiring: 3 x 1.5mm² standard; 3 x 2.5mm² upon request

Please follow local standards for electrical installation.

IN BUSINESS ALL THINGS ARE CONNECTED

METBOX Rail

Dimensions

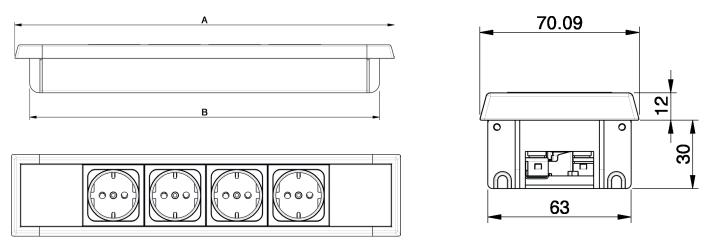


М	2	3	4	5	6	7	8	9	10
Α	228	281	334	387	440	493	546	599	652
В	202	255	308	361	414	467	520	573	626

M = Number of Module Outlets

A = Total Length

B = Total Profile Length

Cut-Out

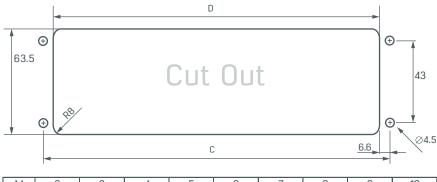

М	2	3	4	5	6	7	8	9	10
С	215.7	268.7	321.7	374.7	427.7	480.7	533.7	586.7	639.7
D	202.5	255.5	308.5	361.5	414.5	467.5	520.5	573.5	626.5

M = Number of modules

C = Distance of Screw Fastening Point

D = Length of Cut Out

Standards and Approvals

Country	Malaysia	Singapore Hong Kong	India	China	Australia New Zealand	Japan	GCC Countries	Indonesia	Korea
Approvals / Test Institute	WAQA0000013		S			PS E	Ś	<u>SNI</u>	K

